


ARIOMAT®

Future-proofing your building

DURABLE WOOD FINISHING AND PROTECTION PRODUCTS FOR
INDOOR AND OUTDOOR USE

CATALOGUE

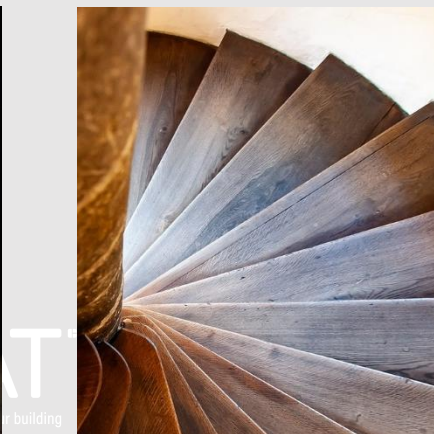


Innovator in durable surface technology
75+ years of experience in production and R&D

Part of Cordeel Group

HQ in Belgium

Made in Belgium

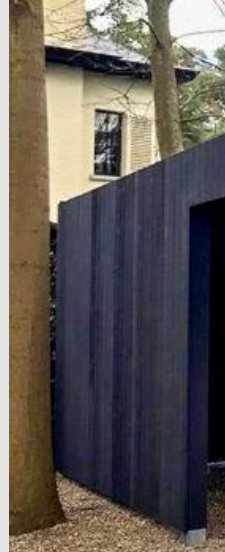

QUALITY

The Ariomat product range consists of high quality ingredients and finished materials.

DURABILITY

We are committed to developing responsible and sustainable systems.

INDOOR WOOD

Finishing
Protection
Maintenance

OUTDOOR WOOD

Finishing & protection
all – in - one

Future-proofing your building



INDOOR/Finishing

Wood Colour Base



Non-reactive water-based wood stains that are applied as a base color to create more even color nuances and combinations. VOC-free, no overlapping, good color stability, easy to apply. For indoor use.

- # layers: 1
- Consumption: 8-14 m²/L, drying time: 2h before applying topcoat
- Colours: see colour chart
- Application: spray gun, roller, brush or buffing machine (white pad). Wipe dry with cloth in the direction of the wood grain until the colour doesn't change anymore (not necessary with buffing machine).
- Topcoats: Wood Varnish 2C or Wood HardWax Oil 2C



Packaging:

100ML, 500ML, 1L & 5L



WOOD COLOUR BASE Colour chart

An overview of our 6 standard Wood colour Base colours.

Broken
white



Sand




UK brown



Dark brown



Light grey

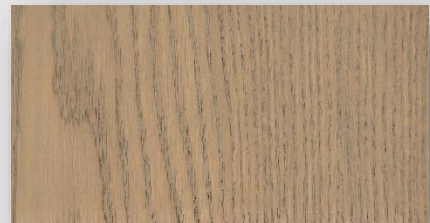

Dark grey



(Disclaimer: The above displayed colours are approximate and indicative and may vary due to printer or screen settings.)

INDOOR/Finishing

Wood Aging Base



Non-reactive wood stains to create smoked, aged, and fumed effects. VOC-free, no overlapping, good color stability, easy to apply. For indoor use.

- # layers: 1
- Consumption: 8-14 m²/L, drying time: 2h before applying topcoat
- Colours: see colour chart
- Application: spray gun, roller, brush or buffing machine (white pad). Wipe dry with cloth in the direction of the wood grain until the colour doesn't change anymore (not necessary with buffing machine).
- Topcoats: Wood Varnish 2C or Wood HardWax Oil 2C



Packaging:

100ML, 500 ML, 1L & 5L



WOOD AGING BASE Colour chart

An overview of our 6 standard Wood Aging Base colours.

Ash



Caramel



Cinnamon



Syrup



Hickory



Gingerbread



(Disclaimer: The above displayed colours are approximate and indicative and may vary due to printer or screen settings.)

INDOOR/Protection

VERNIS (2C)



Water-based, colourless and protective varnish with high resistance to wear and water. Three versions: X-Matt, Matt and Satin. Hides small scratches and defects, no discoloration, easy to apply, durable, natural wood appearance, odorless, and with X-Matt an invisible look and no overlapping. For indoor use. Can also be applied on top of Ariomat Hardwax Oil 2C.

- # layers: 2-3
- Consumption: 18 m²/L

First coat: Drying time: approx. 1h, consumption max: 130 g/m²
Second coat: Drying time: approx. 2-3h, consumption max 100 g/m²
Third coat: Drying time: approx. 2-3h, consumption max 100 g/m²


- Waiting time between layers: 3-5 u.
- VOC: < 20 g/L (Conform Decopaint Directive 2010/75 EU)
- Application: Industrially (spray gun/airless) & on-site (roller/brush)



Packaging:

Part A: 1L, 5L, 20L

Part B: 100ML, 1L, 5L

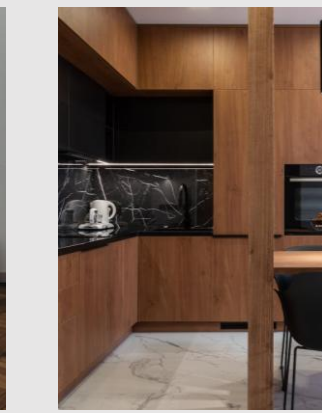

INDOOR/Protection

HARDWAX OIL (2C)



Based on high-quality and natural oils for the decorative protection of indoor wood, MDF, etc. in a single layer. VOC-free, suitable for horizontal and vertical wooden surfaces, provides colour and protection in just one coat, easy to apply on all types of wood, no overlaps, long pot life of the mixture A+B: remains usable for days, if not weeks, after proper sealing. Easy to maintain and renovate.



- Consumption: 40-50m2/liter
- Application: By roller/cloth/ buffing machine
- Natural ingredients: Based on high-quality and natural oils for the decorative protection of indoor wood
- VOC: < 0.5 % (conform EU Decopaint Directive)
- Colours: see colour chart



Verpakkingsgrootte:

Part A: 100ML, 500ML, 1L, 5L

Part B: 100 ML , 1L

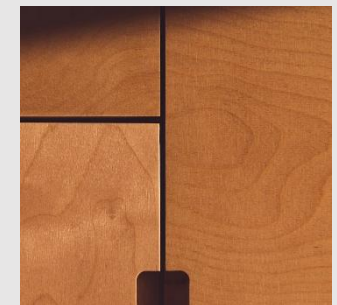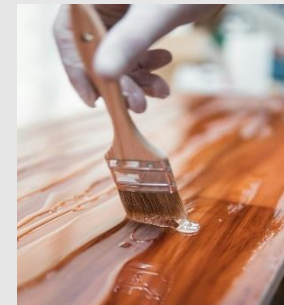


HARDWAX OIL Colour chart

An overview of our 22 standard Hardwax Oil colours.


Natural
white



Misty
white

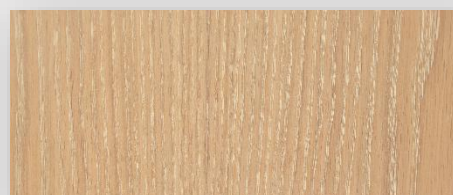


Paper
white

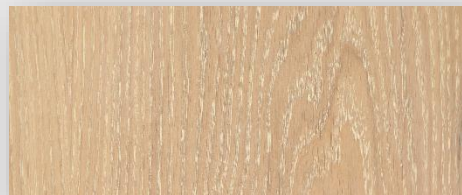

Toffee
brown



Beaver
brown

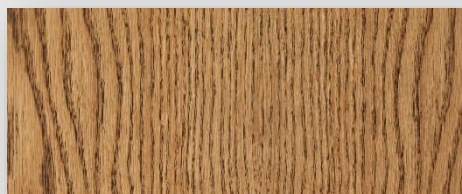

Sugar
brown



Coffee
brown



Cosmic
black



Happy
grain



Balata



Beach
view



Jewel
cut



Ebony




Monkey
nut



Misty
lemon



Smashed
beans

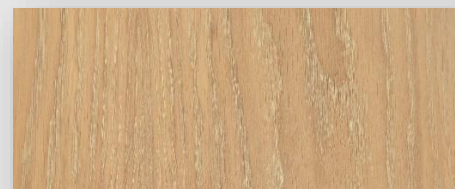

Wheat
sheave



Butter
cookie



Suricate



Straw



Terra
brown



Clear



INDOOR/Maintenance

Wood Soap



Environmentally friendly, neutral and concentrated high-quality soap, for use on surfaces coated with Hardwax oil and Wood Varnish. VOC-free, concentrated, dilutable in water, efficient for cleaning all treated wood surfaces.

- Dilution: 100-250 ml/10 L water
- Drying times: minutes



Packaging:

1 L, 5L



OUTDOOR/Finishing and protection all – in - one

Wood HYDRO SHIELD (Clear en Colour)



Single-layered, waterborne, breathable, durable, clear or coloured finishing and protection in 1, applicable on vertical outdoor and indoor wood. Optimal wood penetration and saturation, hydrophobic and breathable. Protects against weathering, UV and fungi. Easy to apply without overlapping and very durable.

(Complies with **DIN EN-927-6** : Exposure of wood coatings to artificial weathering using fluorescent UV lamps and water.)

- Consumption: 80-100gr/m²
- Colours: see colour chart
- Application: industrially (spraygun/airless) or on-site (roller/brush/cloth/sponge)



Packaging:

500ML, 1L, 2.5L, 5L, 20L, 120L



HYDRO SHIELD Colour chart

An overview of our 17 standard Hydro Shield colours.

Clear




Snow white



Pale green



Pine wood

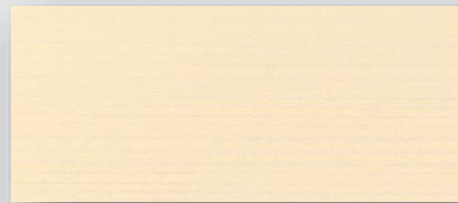

Fern green



Dolphin grey



Pale
blue




Shark
grey




Koala
brown



Asphalt
grey

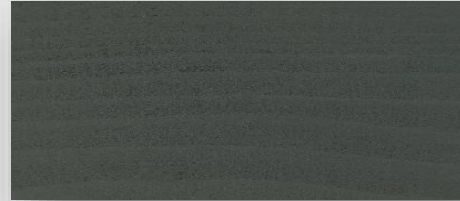

Biscuit
brown

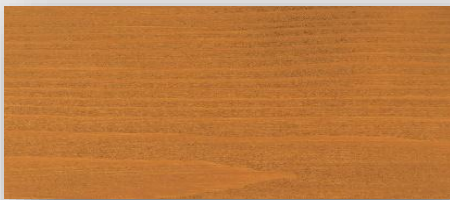

Whale
grey



Cohiba
brown



Intense
black



Bison
brown



Scandinavian
red



Cacao
brown



(Disclaimer: The above displayed colours are approximate and indicative and may vary due to printer or screen settings.)

OUTDOOR/Finishing and protection all – in – one

Wood HYDRO SHIELD SSB (burned wood)



Wood Hydro Shield SSB is a waterborne, durable, strengthening and protective treatment for burnt wood outdoor and indoor. Fixates the soot and maintains the natural character of the wood, hydrophobic and durable, transparent or black, matt or satin, good UV-protection, easy to apply.

- Single layered treatment due to high active ingredients
- Maintains the natural character of the wood
- Hydrophobic and durable
- Transparent or black
- Good UV protection
- Application: industrially (spraygun/airless) and on-site (roller/brush)
- Applicable on **lightly** burned (and/or brushed wood) and **heavily** burned wood



Packaging:

5L, 20L, 120L



OUTDOOR/Finishing and protection all – in – one

Wood HYDRO SHIELD SSB Full Solid (FS) (burned wood)



Wood Hydro Shield SSB FS is a 100% solids, durable protector, specially developed for the finishing of **heavily** burnt wood for indoor and outdoor use. Hydro Shield SSB FS fills up all the air voids of the charred surface and solidifies during curing. This guarantees a super strong surface without changing the look of the burnt wood.

- Only 1 treatment required due to high active ingredient.
- Hydrophobic and durable.
- Transparent or black.
- Very good UV protection and water resistance.
- Super hard surface after curing.
- Very fast curing.
- Application: Spray: Apply only one coat. Make sure to remove all excess material that has not penetrated into the charred surface. This will result in glossy spots.
By brush: Apply once with a soft brush. All excess material on the surface of the boards must be removed to avoid glossy spots



Packaging:

5L, 20L, 120L



Our mission:

To inspire architects and industrial professionals around the world in creating and renovating future-proof buildings with innovative and sustainable surface technology.

Our vision:

Taking the lead in inspiring sustainable surface technology for the architectural world and the construction industry.

ARIOMAT™

Future-proofing your building

ARIOMAT is factory brand of:

SOBELTEC NV

Klein Frankrijkstraat 43

9600 Ronse – BE

SOBELTEC NV is part of CORDEEL Group

Tel: +32 (0)55 23 06 00

E-mail: info@ariomat.com

www.ariomat.com

Powered by  i-Innovation

Made in Belgium

