

soa source
of
asia

HERE TO GET YOU THERE



soa COATING
SOLUTIONS
Powered by source of asia

ARIOMAT™
Woodline

ARIOMAT[®]



ARIOMAT[®]
Woodline

WHERE **WOOD** BECOMES
CRAFTSMANSHIP



ARIOMAT[®]
Stucline

WHERE SURFACES
BECOME **ART**

Corporate Structure



CORPORATE SERVICES

FINANCE | DIGITECH | HR | MARCOM | QHSE | ESG | LEGAL

EXPERT DIVISIONS

construct

- cordeel
- Belgium
- Nederland
- geelen
- Bulgaria
- Serbia

- Bernard
- maintenance
- supply
- rental

production

- concrete
- wood
- metal
- BAECK
BUILDING nv
- OFFSITEBELGIUM

tech

- imtech
Multi-technical experts
- evh
Uitstek in elektronische
- guard
- bimco
- FLYWEL

energy

- energy
- battery
- MEAM

living

- living
Residential
- living
Logistics
- vita
GROEP

innovation

- biotech
- +EARTH+
- ground
- fire
- CONTROLFIRE
- SOBELTEC
FINE CHEMICALS
- ARIOMAT

ARIOMAT
Woodline

ARIOMAT
Stucline



Innovator in durable surface technology

75+ years of experience in production and R&D

100 % part of Cordeel Group

HQ in Belgium

Made in Belgium



ARIOMAT[®]
Woodline

ARIOMAT[®]
Stucline

Mission

Inspiring manufacturers, architects and industry craftspeople across the globe in creating and renovating future-proof buildings through innovative and durable surface technology.



Vision

Taking the lead in inspiring and durable surface technology for the architectural and building industry.

Business Brands



Customized chemical solutions for various business segments, such as textiles, synthetic fibers, cement and lime, fire retardants, etc.

ARIOMAT[®]

ARIOMAT[®]
Woodline

ARIOMAT[®]
Stucline

Factory brand for decorative plaster, wall paint and wood treatment. Sold under the brand names Ariomat Woodline and Ariomat Stucline.

A photograph of a modern building with extensive wood cladding. A woman with long dark hair is seen from behind, looking out of a large window. The interior of the window shows a warm, wood-paneled room with a hanging lamp. A bright light strip runs along the edge of the building's roofline.

ARIOMAT[®]

Woodline

WHERE **WOOD** BECOMES
CRAFTSMANSHIP

TABLE OF CONTENTS

INDOOR

Prep.

Finishing

Protection

Maintenance

OUTDOOR

Finishing
and protection
all-in-one

Wood FibrePrep

Wood Colour Base

Wood Aging Base

Wood Hardwax Oil 2C

Wood Varnish 2C

Wood Soap N

Wood Maintenance Oil

Wood Hydro Shield

Wood Hydro Shield SSB

Wood Hydro Shield SSB FS

WOOD COLOUR BASE



Non-reactive water-based wood stains that are applied as a base color to create more even color nuances and combinations. VOC-free, no overlapping, good color stability, easy to apply. For indoor use.

# layers	1
Consumption	8-14 m ² /L
Drying time	2h before applying topcoat
Colours	See colour chart
Application	Spray gun, roller, brush or buffing machine (white pad). Wipe dry with cloth in the direction of the wood grain until the colour doesn't change anymore (not necessary with buffing machine).
Topcoats	Wood Vamish 2C or Wood HardWax Oil 2C



Available in:
100 ML • 500 ML • 1 L • 5L



WOOD AGING BASE



Non-reactive wood stains to create smoked, aged, and fumed effects. VOC-free, no overlapping, good color stability, easy to apply. For indoor use.

# layers	1
Consumption	8-14 m ² /L
Drying time	2h before applying topcoat
Colours	See colour chart
Application	Spray gun, roller, brush or buffing machine (white pad). Wipe dry with cloth in the direction of the wood grain until the colour doesn't change anymore (not necessary with buffing machine).
Topcoats	Wood Vamish 2C or Wood HardWax Oil 2C




Available in:
100 ML • 500 ML • 1 L • 5L




COLOUR CHART

Overview of our 6 standard Wood Colour Base colours.
Disclaimer: the displayed colours are approximate and indicative and may vary due to printer or screen settings.

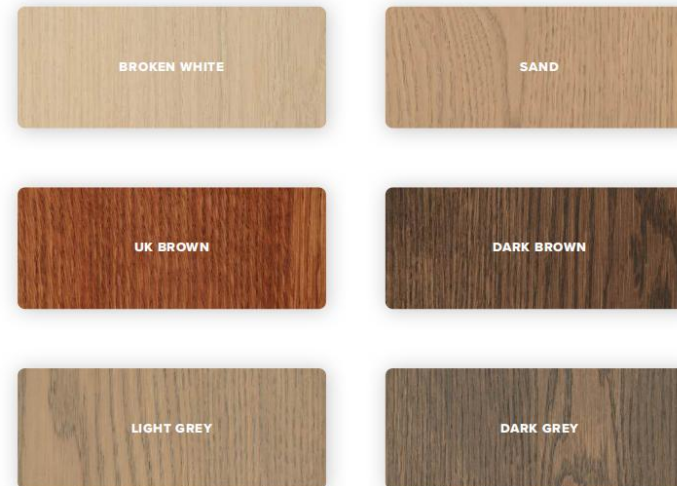

COLOUR CHART

Overview of our 6 standard Wood Aging Base colours.
Disclaimer: the displayed colours are approximate and indicative and may vary due to printer or screen settings.

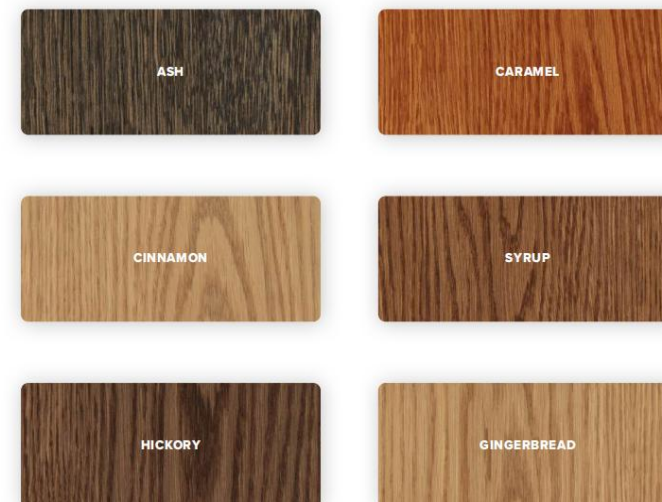

INDOOR

Protection

WOOD HARDWAX OIL

Based on high-quality and natural oils for the decorative protection of indoor wood, MDF, etc. in a single layer. VOC-free, suitable for horizontal and vertical wooden surfaces, provides colour and protection in just one coat, easy to apply on all types of wood, no overlaps, long pot life of the mixture A+B: remains usable for days, if not weeks, after proper sealing. Easy to maintain and renovate.



Available in:

Part A 100 ML + 500 ML + 1 L + 5 L

Part B 100 ML + 1 L

Consumption	40-50 m ² /L
Application	By roller, cloth or buffing machine
Natural ingredients	Based on high-quality and natural oils for the decorative protection of indoor wood
VOC	< 0.5 % (conform EU Decopaint Directive)
Colours	See colour chart



NATURAL WHITE

MISTY WHITE

PAPER WHITE

TOFFEE BROWN

BEAVER BROWN

SUGAR BROWN

COFFEE BROWN

COSMIC BLACK

HAPPY GRAIN

BALATA

BEACH VIEW

JEWEL CUT

EBONY

MONKEY NUT

MISTY LEMON

SMASHED BEANS

WHEAT SHEAVE

BUTTER COOKIE

SURICATE

STRAW

TERRA BROWN

CLEAR



INDOOR

Protection

WOOD VARNISH (2C)



Water-based, colourless and protective varnish with high resistance to wear and water. Three versions: X-Matt, Matt and Satin. Hides small scratches and defects, no discoloration, easy to apply, durable, natural wood appearance, odorless, and with X-Matt an invisible look and no overlapping. For indoor use. Can also be applied on top of Ariomat Hardwax Oil 2C.



# layers	2-3
Consumption	18 m ² /L
First coat	Drying time: approx. 1h, max cons.: 130 g/m ²
Second coat	Drying time: approx. 2-3h, max cons.: 100 g/m ²
Third coat	Drying time: approx. 2-3h, max cons.: 100 g/m ²
Waiting time	Between layers: 3-5 h
VOC	< 20 g/L (Conform Decopaint Directive 2010/75 EU)
Application	Industrially (spray gun/airless) & on-site (roller/brush)

Available in:

Part A 1 L • 5 L • 20 L

Part B 100 ML • 1 L • 5 L



WOOD HYDRO SHIELD

(Clear and Colour)


Single-layered, waterborne, breathable, durable, clear or coloured finishing and protection in 1, applicable on vertical outdoor and indoor wood. Optimal wood penetration and saturation, hydrophobic and breathable. Protects against weathering, UV and fungi. Easy to apply without overlapping and very durable. (Complies with DIN EN-927-6: Exposure of wood coatings to artificial weathering using fluorescent UV lamps and water.)



Consumption	80-100gr/m ²
Colours	See colour chart
Application	Industrially (spraygun/airless) or on-site (roller/brush/cloth/sponge)

Available in:

500 ML • 1 L • 2,5 L • 5 L • 20 L • 120 L

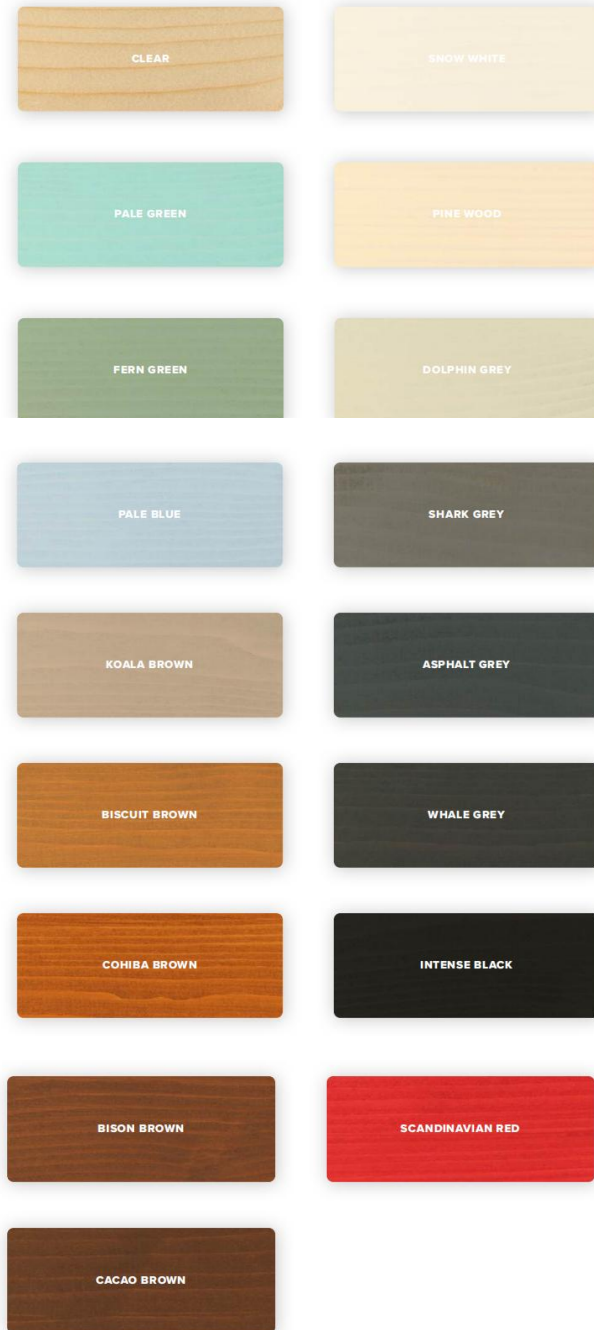

HYDRO SHIELD SSB

(Burnt Wood)

Wood Hydro Shield SSB is a waterborne, durable, strengthening and protective treatment for burnt wood outdoor and indoor. Fixes the soot and maintains the natural character of the wood, hydrophobic and durable, transparent or black, matt or satin, good UV-protection, easy to apply.

# layers	Single layered due to high active ingredients
X	Maintains the natural character of the wood
X	Hydrophobic and durable
Colour	Transparent or black
X	Good UV protection
Application	Industrially (spraygun/airless) & on-site (roller/brush)
X	Applicable on lightly bumed (and/or brushed wood) and heavily bumed wood



Available in:
5 L • 20 L • 120 L



HYDRO SHIELD SSB

Full Solid (Burned Wood)

Wood Hydro Shield SSB FS is a 100% solids, durable protector, specially developed for the finishing of heavily burnt wood for indoor and outdoor use. Hydro Shield SSB FS fills up all the air voids of the charred surface and solidifies during curing. This guarantees a super strong surface without changing the look of the burnt wood.

# layers	Only 1 treatment, due to high active ingredient.
X	Hydrophobic and durable
Colour	Transparent or black
X	Very good UV protection and water resistance
X	Super hard surface after curing
X	Very fast curing
Application	Spray: Apply only one coat. Make sure to remove all excess material that has not penetrated into the charred surface. This will result in glossy spots. By brush: Apply once with a soft brush. All excess material on the surface of the boards must be removed to avoid glossy spots.




Available in:
5 L • 20 L • 120 L



WOOD HYDRO SHIELD SSB

WOOD HYDRO SHIELD SSB

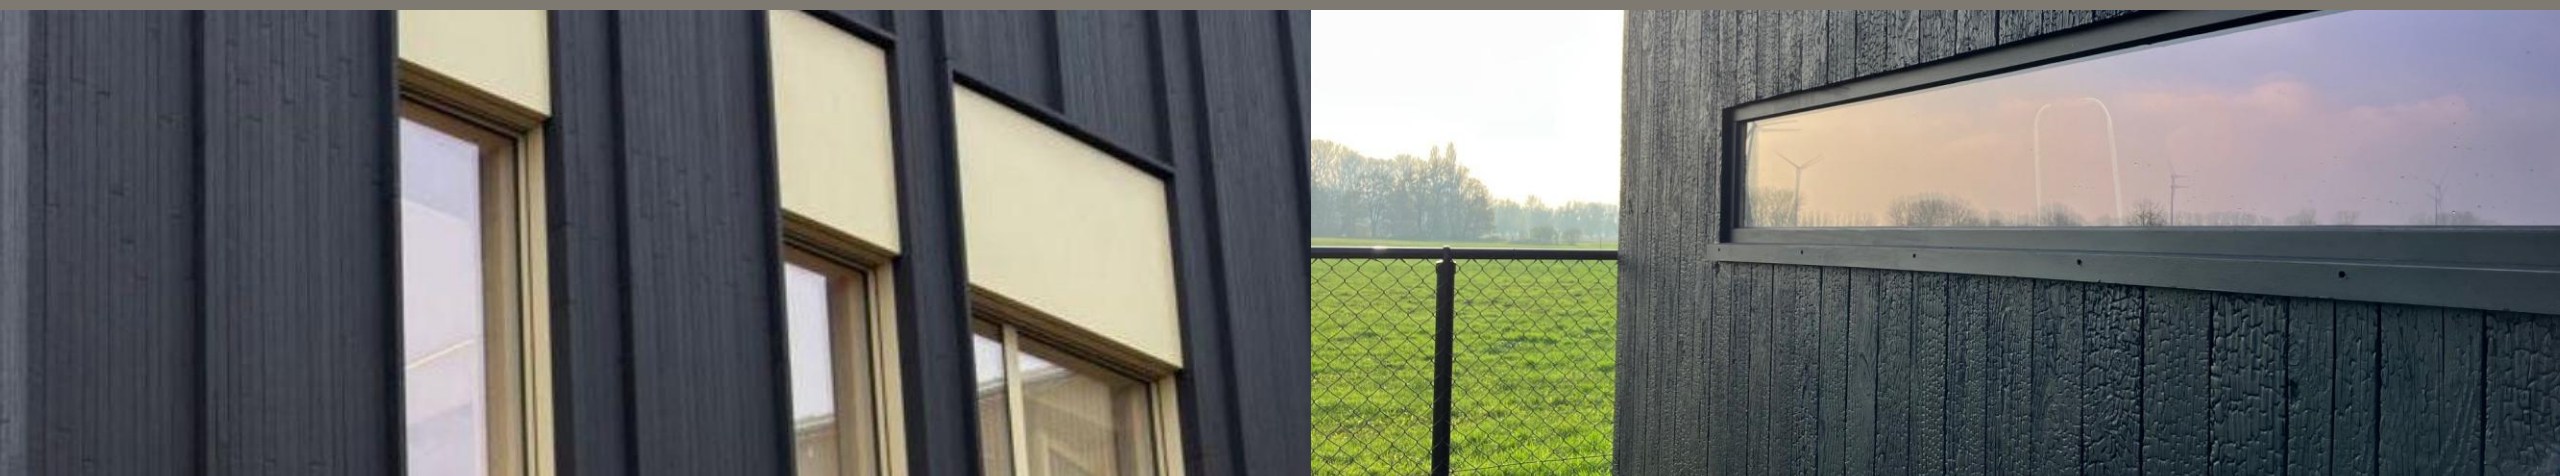

ARIOMAT[®]

Stucline

WHERE SURFACES
BECOME **ART**



ARIOMAT[®]

Stucline

DECORATIVE PLASTERS for
INDOOR USE



PAINTS for INDOOR
USE



ARIOMAT[®]

Stucline



Pick your
favorite finish

Calce

Unique and decorative
ready-to-use lime-based plaster

Robusta

Strong and decorative
ready-to-use plaster

Armato

Strong, decorative and
waterproof 2 component plaster

ARIOMAT[®]

Stucline

Calce


Unique and decorative
ready-to-use lime-based plaster

Robusta

Strong and decorative
ready-to-use plaster

Armato

Strong, decorative and
waterproof 2 component plaster

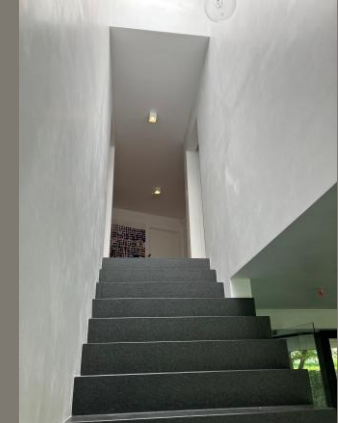

The logo for Source of Asia, featuring the letters 'SOA' in a bold, pink, stylized font. The 'O' is a solid circle, and the 'A' has a unique shape with a horizontal bar. The background is a scenic landscape of terraced rice fields in Vietnam, with a sunburst effect in the upper right corner and a pink circular graphic on the right side.

SOA

Xin Cảm Ơn
Merci
Thank you

Source of Asia

Floor 9-11 , The Galleria Metro 6
Office Tower, 59 Xa Lo Ha Noi,
Thao Dien Ward, Thu Duc City, Ho
Chi Minh City, Vietnam
Email: hello@sourceofasia.com
Website: www.sourceofasia.com
Phone: +84 (0)2836206417